


# Polyurethan-Zahnriemen

(endlos, metrische Teilung)  
Profil AT

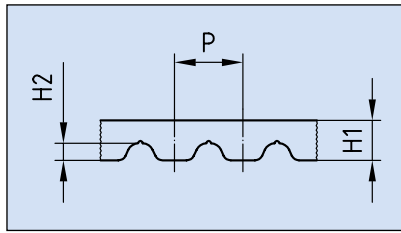

## AT 5 (Teilung = 5,0 mm)

Artikel-Nr. Ketten Fuchs	Wirklänge in mm	Zähnezahl	Standardbreiten in mm (Bitte ausgewählte Breite vor Art.-Nr. setzen)						
			6	8	10	12	16	20	25
AT5-225	225,0	45	6	8	10	12	16	20	25
AT5-255	255,0	51	6	8	10	12	16	20	25
AT5-275	275,0	55	6	8	10	12	16	20	25
AT5-280	280,0	56	6	8	10	12	16	20	25
AT5-300	300,0	60	6	8	10	12	16	20	25
AT5-330	330,0	66	6	8	10	12	16	20	25
AT5-340	340,0	68	6	8	10	12	16	20	25
AT5-375	375,0	75	6	8	10	12	16	20	25
AT5-390	390,0	78	6	8	10	12	16	20	25
AT5-420	420,0	84	6	8	10	12	16	20	25
AT5-450	450,0	90	6	8	10	12	16	20	25
AT5-455	455,0	91	6	8	10	12	16	20	25
AT5-480	480,0	96	6	8	10	12	16	20	25
AT5-500	500,0	100	6	8	10	12	16	20	25
AT5-525	525,0	105	6	8	10	12	16	20	25
AT5-545	545,0	109	6	8	10	12	16	20	25
AT5-600	600,0	120	6	8	10	12	16	20	25

## AT 10 (Teilung = 10,0 mm)

Artikel-Nr. Ketten Fuchs	Wirklänge in mm	Zähnezahl	Standardbreiten in mm (Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
AT10-370	370,0	37	10	12	16	20	25	32	50	75
AT10-500	500,0	50	10	12	16	20	25	32	50	75
AT10-560	560,0	56	10	12	16	20	25	32	50	75
AT10-580	580,0	58	10	12	16	20	25	32	50	75
AT10-600	600,0	60	10	12	16	20	25	32	50	75
AT10-610	610,0	61	10	12	16	20	25	32	50	75
AT10-630	630,0	63	10	12	16	20	25	32	50	75
AT10-660	660,0	66	10	12	16	20	25	32	50	75
AT10-700	700,0	70	10	12	16	20	25	32	50	75
AT10-730	730,0	78	10	12	16	20	25	32	50	75
AT10-780	780,0	78	10	12	16	20	25	32	50	75
AT10-800	800,0	80	10	12	16	20	25	32	50	75
AT10-810	810,0	81	10	12	16	20	25	32	50	75
AT10-840	840,0	84	10	12	16	20	25	32	50	75
AT10-880	880,0	88	10	12	16	20	25	32	50	75
AT10-890	890,0	89	10	12	16	20	25	32	50	75
AT10-920	920,0	92	10	12	16	20	25	32	50	75
AT10-960	960,0	96	10	12	16	20	25	32	50	75
AT10-980	980,0	98	10	12	16	20	25	32	50	75
AT10-1000	1000,0	100	10	12	16	20	25	32	50	75
AT10-1010	1010,0	101	10	12	16	20	25	32	50	75
AT10-1050	1050,0	105	10	12	16	20	25	32	50	75
AT10-1080	1080,0	108	10	12	16	20	25	32	50	75
AT10-1100	1100,0	110	10	12	16	20	25	32	50	75
AT10-1150	1150,0	115	10	12	16	20	25	32	50	75
AT10-1190	1190,0	119	10	12	16	20	25	32	50	75
AT10-1200	1200,0	120	10	12	16	20	25	32	50	75
AT10-1210	1210,0	121	10	12	16	20	25	32	50	75

Typ	P mm	H2 mm	H1 mm
AT5	5,0	1,2	2,7
AT10	10,0	2,5	4,5
AT20	20,0	5,0	8,0

Artikel-Nr. Ketten Fuchs	Wirklänge in mm	Zähnezahl	Standardbreiten in mm (Bitte ausgewählte Breite vor Art.-Nr. setzen)						
			6	8	10	12	16	20	25
AT5-610	610,0	122	6	8	10	12	16	20	25
AT5-620	620,0	124	6	8	10	12	16	20	25
AT5-630	630,0	126	6	8	10	12	16	20	25
AT5-660	660,0	132	6	8	10	12	16	20	25
AT5-670	670,0	134	6	8	10	12	16	20	25
AT5-710	710,0	142	6	8	10	12	16	20	25
AT5-720	720,0	144	6	8	10	12	16	20	25
AT5-750	750,0	150	6	8	10	12	16	20	25
AT5-780	780,0	156	6	8	10	12	16	20	25
AT5-825	825,0	165	6	8	10	12	16	20	25
AT5-860	860,0	172	6	8	10	12	16	20	25
AT5-975	975,0	195	6	8	10	12	16	20	25
AT5-1050	1050,0	210	6	8	10	12	16	20	25
AT5-1125	1125,0	225	6	8	10	12	16	20	25
AT5-1500	1500,0	300	6	8	10	12	16	20	25
AT5-2000	2000,0	400	6	8	10	12	16	20	25

Riemengewicht = 3,2 × g/m × Breite in mm

## AT 10 (Teilung = 10,0 mm)

Artikel-Nr. Ketten Fuchs	Wirklänge in mm	Zähnezahl	Standardbreiten in mm (Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
AT10-1220	1220,0	122	10	12	16	20	25	32	50	75
AT10-1230	1230,0	123	10	12	16	20	25	32	50	75
AT10-1240	1240,0	124	10	12	16	20	25	32	50	75
AT10-1250	1250,0	125	10	12	16	20	25	32	50	75
AT10-1280	1280,0	128	10	12	16	20	25	32	50	75
AT10-1300	1300,0	130	10	12	16	20	25	32	50	75
AT10-1320	1320,0	132	10	12	16	20	25	32	50	75
AT10-1350	1350,0	135	10	12	16	20	25	32	50	75
AT10-1360	1360,0	136	10	12	16	20	25	32	50	75
AT10-1400	1400,0	140	10	12	16	20	25	32	50	75
AT10-1420	1420,0	142	10	12	16	20	25	32	50	75
AT10-1480	1480,0	148	10	12	16	20	25	32	50	75
AT10-1500	1500,0	150	10	12	16	20	25	32	50	75
AT10-1600	1600,0	160	10	12	16	20	25	32	50	75
AT10-1630	1630,0	163	10	12	16	20	25	32	50	75
AT10-1700	1700,0	170	10	12	16	20	25	32	50	75
AT10-1720	1720,0	172	10	12	16	20	25	32	50	75
AT10-1800	1800,0	180	10	12	16	20	25	32	50	75
AT10-1860	1860,0	186	10	12	16	20	25	32	50	75
AT10-1940	1940,0	194	10	12	16	20	25	32	50	75

Riemengewicht = 5,9 × g/m × Breite in mm

## AT 20 (Teilung = 20,0 mm)

Artikel-Nr. Ketten Fuchs	Wirklänge in mm	Zähnezahl	Standardbreiten in mm (Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
AT20-1000	1000,0	50	10	12	16	20	25	32	50	75