
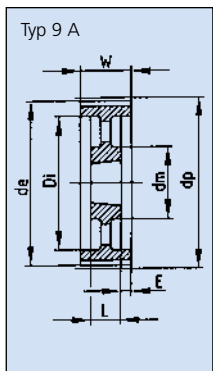
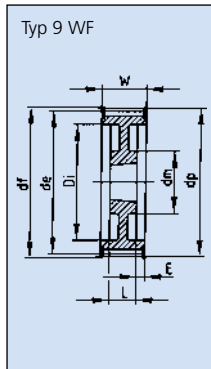
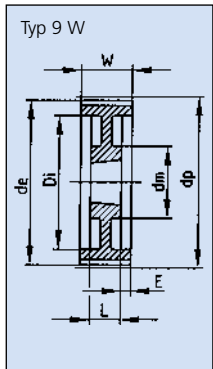
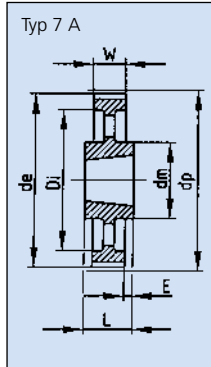
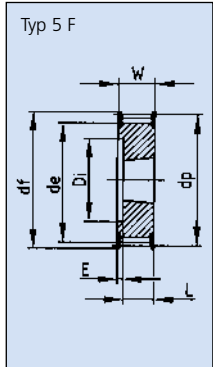
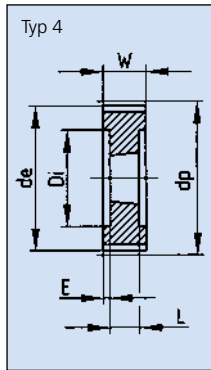


HTD-Zahnriemenscheiben für Taper-Spannbuchsen

8M (Teilung = 8 mm) – für Zahnriemenbreite = 50 mm

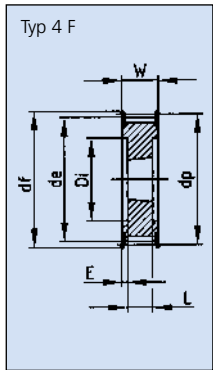

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Buchse	Abmessungen in mm							
					de	dp	dm	Di	df	W	E	L
TL28-8M-50	28	5F	St	1210	70,08	71,30	-	50,0	75,0	60,0	35,0	25,0
TL30-8M-50	30	5F	St	1615	75,13	76,39	-	58,0	82,5	60,0	22,0	38,0
TL32-8M-50	32	5F	St	1615	80,16	81,49	-	63,0	87,0	60,0	22,0	38,0
TL34-8M-50	34	5F	St	1615	85,22	86,58	-	65,0	91,0	60,0	22,0	38,0
TL36-8M-50	36	5F	St	1615	90,30	91,67	-	68,0	97,0	60,0	22,0	38,0
TL38-8M-50	38	5F	St	1615	95,39	96,77	-	72,0	102,0	60,0	22,0	38,0
TL40-8M-50	40	4F	St	2012	100,49	101,86	-	80,0	106,0	60,0	14,0	32,0
TL44-8M-50	44	4F	St	2012	110,67	112,05	-	86,0	120,0	60,0	14,0	32,0
TL48-8M-50	48	4F	St	2012	120,86	122,23	-	95,0	128,0	60,0	14,0	32,0
TL56-8M-50	56	4F	St	2517	141,23	142,60	-	116,0	150,0	60,0	7,5	45,0
TL64-8M-50	64	4F	St	2517	161,60	162,97	-	136,0	168,0	60,0	7,5	45,0
TL72-8M-50	72	9WF	St	2517	181,97	183,35	125,0	158,0	192,0	60,0	7,5	45,0
TL80-8M-50	80	4	GG	3020	202,30	203,72	-	180,0	-	60,0	4,5	51,0
TL90-8M-50	90	9W	GG	3020	227,81	229,18	160,0	204,0	-	60,0	4,5	51,0
TL112-8M-50	112	9W	GG	3020	283,83	285,21	170,0	254,0	-	60,0	4,5	51,0
TL144-8M-50	144	9A	GG	3020	365,32	366,69	170,0	336,0	-	60,0	4,5	51,0
TL168-8M-50	168	7A	GG	3525	426,44	427,81	198,0	395,0	-	60,0	2,5	65,0
TL192-8M-50	192	7A	GG	3525	487,55	488,92	198,0	455,0	-	60,0	2,5	65,0

8M (Teilung = 8 mm) – für Zahnriemenbreite = 85 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Buchse	Abmessungen in mm							
					de	dp	dm	Di	df	W	E	L
TL34-8M-85	34	4F	St	1615	85,22	86,58	-	65,0	91,0	95,0	28,5	38,0
TL36-8M-85	36	4F	St	1615	90,30	91,67	-	68,0	97,0	95,0	28,5	38,0
TL38-8M-85	38	4F	St	1615	95,39	96,77	-	72,0	102,0	95,0	28,5	38,0
TL40-8M-85	40	4F	St	2012	100,49	101,86	-	80,0	106,0	95,0	31,5	32,0
TL44-8M-85	44	4F	St	2012	110,67	112,05	-	86,0	120,0	95,0	31,5	32,0
TL48-8M-85	48	4F	St	2517	120,86	122,23	-	97,0	128,0	95,0	25,0	45,0
TL56-8M-85	56	4F	St	2517	141,23	142,60	-	116,0	150,0	95,0	25,0	45,0
TL64-8M-85	64	4F	St	2517	161,60	162,97	-	136,0	168,0	95,0	25,0	45,0
TL72-8M-85	72	4F	St	3020	181,97	183,35	-	150,0	192,0	95,0	22,0	51,0
TL80-8M-85	80	4	GG	3020	202,35	203,72	-	180,0	-	95,0	22,0	51,0
TL90-8M-85	90	4	GG	3020	227,81	229,18	-	204,0	-	95,0	22,0	51,0
TL112-8M-85	112	9W	GG	3020	283,83	285,21	170,0	254,0	-	95,0	22,0	51,0
TL144-8M-85	144	9W	GG	3525	365,32	366,69	198,0	336,0	-	95,0	15,0	65,0
TL168-8M-85	168	9A	GG	3525	426,44	427,81	198,0	395,0	-	95,0	15,0	65,0
TL192-8M-85	192	9A	GG	3525	487,55	488,92	198,0	455,0	-	95,0	15,0	65,0

Bestellbeispiel

			Zähnezahl 48
			Riementeilung 8 mm
TL48	8 M	25	Riemenbreite 25 mm