

**AT 5**


Typ	Wirklänge (mm)	Zähnezahl
AT 5- 225	225	45
AT 5- 255	255	51
AT 5- 280	280	56
AT 5- 300	300	60
AT 5- 340	340	68
AT 5- 375	375	75
AT 5- 390	390	78
AT 5- 420	420	84
AT 5- 450	450	90
AT 5- 455	455	91
AT 5- 500	500	100
AT 5- 545	545	109
AT 5- 600	600	120
AT 5- 610	610	122
AT 5- 660	660	132
AT 5- 710	710	142
AT 5- 720	720	144
AT 5- 750	750	150
AT 5- 780	780	156
AT 5- 825	825	165
AT 5- 975	975	195
AT 5-1050	1050	210
AT 5-1125	1125	225
AT 5-1500	1500	300

**AT 10**

Typ	Wirklänge (mm)	Zähnezahl
AT 10- 500	500	50
AT 10- 560	560	56
AT 10- 600	600	60
AT 10- 610	610	61
AT 10- 660	660	66
AT 10- 700	700	70
AT 10- 730	730	73
AT 10- 780	780	78
AT 10- 800	800	80
AT 10- 840	840	84
AT 10- 890	890	89
AT 10- 920	920	92
AT 10- 960	960	96
AT 10- 980	980	98
AT 10-1000	1000	100
AT 10-1010	1010	101
AT 10-1050	1050	105
AT 10-1080	1080	108
AT 10-1100	1100	110
AT 10-1150	1150	115
AT 10-1200	1200	120
AT 10-1210	1210	121
AT 10-1250	1250	125
AT 10-1280	1280	128
AT 10-1300	1300	130
AT 10-1320	1320	132
AT 10-1350	1350	135
AT 10-1360	1360	136
AT 10-1400	1400	140
AT 10-1480	1480	148
AT 10-1500	1500	150
AT 10-1600	1600	160
AT 10-1700	1700	170
AT 10-1720	1720	172
AT 10-1800	1800	180
AT 10-1860	1860	186
AT 10-1940	1940	194

**Polyurethan-  
Zahnriemen**

(endlos, metrische Teilung)  
Profil AT/T-DL

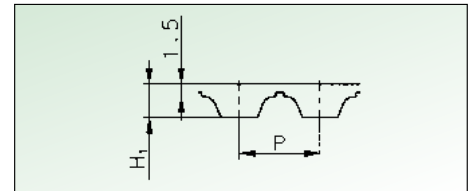


Typ	P (mm)	H <sub>1</sub> (mm)	H <sub>2</sub> (mm)	W (mm)	β° (Grad)
AT5	5,0	2,7	1,2	2,5	50
AT 10	10,0	5,0	2,5	5,0	50

**T5 DL – Teilung 5 mm**

Typ	Wirklänge (mm)	Zähnezahl
T5 DL- 410*	410,0	82
T5 DL- 460	460,0	92
T5 DL- 480*	480,0	96
T5 DL- 515*	515,0	103
T5 DL- 590	590,0	118
T5 DL- 620	620,0	124
T5 DL- 750	750,0	150
T5 DL- 815	815,0	163
T5 DL- 860	860,0	172
T5 DL- 940	940,0	188
T5 DL-1100	1100,0	220

**T10 DL – Teilung 10 mm**

Typ	Wirklänge (mm)	Zähnezahl
T10 DL- 260	260,0	26
T10 DL- 530	530,0	53
T10 DL- 630	630,0	63
T10 DL- 660	660,0	66
T10 DL- 720	720,0	72
T10 DL- 800*	800,0	80
T10 DL- 840	840,0	84
T10 DL- 980	980,0	98
T10 DL- 1100*	1100,0	110
T10 DL-1210	1210,0	121
T10 DL-1240	1240,0	124
T10 DL-1250	1250,0	125
T10 DL-1320	1320,0	132
T10 DL-1350	1350,0	135
T10 DL-1420	1420,0	142
T10 DL-1500*	1500,0	150
T10 DL-1610	1610,0	161
T10 DL-1880	1880,0	188

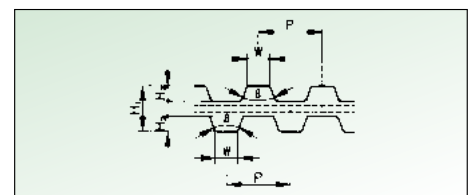

Typ	P (mm)	H <sub>1</sub> (mm)	H <sub>2</sub> (mm)	W (mm)	β° (Grad)
T5 DL	5,0	3,0	1,2	1,8	40
T10 DL	10,0	6,5	2,5	3,5	40

**Standardbreiten**

Typ	6	8	10	12	16	20	25	32	50	75
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
AT 5	●	●	●	●	●	●	●			
AT10			●	●	●	●	●	●	●	●

**Bestellbeispiel**

25	AT10	960	Riemenbreite 25 mm
			Riementeilung 10 mm
			Wirklänge 960 mm