

| Artikel-Nr.<br>Ketten Fuchs | Modul | Zähne-<br>zahl | Abmessungen in mm |       |      |      |       |      |        |      |     |      |
|-----------------------------|-------|----------------|-------------------|-------|------|------|-------|------|--------|------|-----|------|
|                             |       |                | de                | dp    | A    | F    | Dn    | D1   | dm     | L    | S   | Lm   |
| 420-015-116A                | 1,5   | 16             | 26,12             | 24,0  | 18,9 | 6,0  | 20,3  | 8,0  | 26,00  | -    | -   | 12,0 |
| 420-015-120A                | 1,5   | 20             | 32,12             | 30,0  | 20,0 | 10,0 | 22,0  | 10,0 | 27,40  | 18,0 | 2,0 | 8,5  |
| 420-015-125A                | 1,5   | 25             | 39,62             | 37,5  | 23,0 | 10,0 | 28,0  | 10,0 | 34,09  | 21,0 | 2,0 | 12,0 |
| 420-015-130A                | 1,5   | 30             | 47,12             | 45,0  | 25,0 | 12,0 | 30,0  | 12,0 | 38,35  | 22,5 | 2,5 | 12,0 |
| 420-020-116A                | 2,0   | 16             | 34,83             | 32,0  | 23,5 | 8,0  | 25,3  | 8,0  | 33,00  | -    | -   | 14,0 |
| 420-020-120A                | 2,0   | 20             | 42,83             | 40,0  | 25,0 | 12,0 | 32,0  | 10,0 | 35,78  | 22,0 | 3,0 | 11,7 |
| 420-020-125A                | 2,0   | 25             | 52,82             | 50,0  | 28,0 | 14,0 | 40,0  | 12,0 | 42,28  | 25,0 | 3,0 | 12,3 |
| 420-020-130A                | 2,0   | 30             | 62,83             | 60,0  | 30,0 | 16,0 | 50,0  | 12,0 | 47,78  | 27,0 | 3,0 | 12,8 |
| 420-025-116A                | 2,5   | 16             | 43,53             | 40,0  | 28,1 | 10,0 | 30,3  | 12,0 | 40,00  | -    | -   | 15,0 |
| 420-025-120A                | 2,5   | 20             | 53,53             | 50,0  | 30,5 | 12,0 | 40,0  | 12,0 | 45,93  | 27,0 | 3,5 | 16,0 |
| 420-025-125A                | 2,5   | 25             | 66,00             | 62,5  | 33,5 | 15,0 | 50,0  | 15,0 | 52,98  | 30,0 | 3,5 | 16,0 |
| 420-025-130A                | 2,5   | 30             | 78,53             | 75,0  | 35,5 | 18,0 | 55,0  | 15,0 | 59,13  | 32,0 | 3,5 | 16,0 |
| 420-030-116A                | 3,0   | 16             | 52,25             | 48,0  | 31,7 | 12,0 | 40,3  | 12,0 | 46,00  | -    | -   | 18,0 |
| 420-030-120A                | 3,0   | 20             | 64,24             | 60,0  | 35,0 | 18,0 | 45,0  | 15,0 | 51,00  | 31,0 | 4,0 | 13,6 |
| 420-030-125A                | 3,0   | 25             | 79,24             | 75,0  | 38,0 | 20,0 | 55,0  | 15,0 | 60,00  | 34,0 | 4,0 | 16,0 |
| 420-030-130A                | 3,0   | 30             | 94,24             | 90,0  | 40,0 | 22,0 | 60,0  | 20,0 | 68,00  | 36,0 | 4,0 | 17,0 |
| 420-035-116A                | 3,5   | 16             | 60,95             | 56,0  | 36,4 | 14,0 | 45,3  | 16,0 | 53,00  | -    | -   | 20,0 |
| 420-035-120A                | 3,5   | 20             | 74,95             | 70,0  | 40,5 | 22,0 | 55,0  | 15,0 | 58,63  | 36,0 | 4,5 | 17,0 |
| 420-035-125A                | 3,5   | 25             | 92,45             | 87,5  | 43,5 | 26,0 | 65,0  | 20,0 | 67,47  | 39,0 | 4,5 | 18,0 |
| 420-035-130A                | 3,5   | 30             | 109,95            | 105,0 | 48,0 | 30,0 | 70,0  | 20,0 | 78,02  | 43,5 | 4,5 | 19,0 |
| 420-040-116A                | 4,0   | 16             | 69,65             | 64,0  | 44,3 | 15,0 | 50,3  | 16,0 | 64,00  | -    | -   | 25,0 |
| 420-040-120A                | 4,0   | 20             | 85,65             | 80,0  | 43,0 | 25,0 | 60,0  | 18,0 | 63,74  | 38,0 | 5,0 | 18,0 |
| 420-040-125A                | 4,0   | 25             | 105,65            | 100,0 | 45,0 | 28,0 | 70,0  | 20,0 | 73,50  | 40,0 | 5,0 | 18,0 |
| 420-040-130A                | 4,0   | 30             | 125,65            | 120,0 | 48,0 | 32,0 | 80,0  | 20,0 | 83,67  | 43,0 | 5,0 | 16,0 |
| 420-045-116A                | 4,5   | 16             | 78,38             | 72,0  | 46,3 | 17,5 | 55,3  | 20,0 | 68,00  | -    | -   | 25,0 |
| 420-045-120A                | 4,5   | 20             | 96,38             | 90,0  | 48,0 | 28,0 | 65,0  | 20,0 | 71,41  | 42,0 | 6,0 | 18,0 |
| 420-045-125A                | 4,5   | 25             | 118,80            | 112,5 | 50,0 | 32,0 | 75,0  | 20,0 | 81,76  | 44,0 | 6,0 | 18,0 |
| 420-045-130A                | 4,5   | 30             | 141,38            | 135,0 | 53,0 | 35,0 | 90,0  | 20,0 | 93,82  | 47,0 | 6,0 | 17,0 |
| 420-050-116A                | 5,0   | 16             | 87,07             | 80,0  | 48,9 | 18,0 | 60,3  | 20,0 | 74,00  | -    | -   | 25,0 |
| 420-050-120A                | 5,0   | 20             | 107,07            | 100,0 | 50,5 | 30,0 | 70,0  | 20,0 | 77,36  | 44,0 | 6,5 | 18,5 |
| 420-050-125A                | 5,0   | 25             | 132,07            | 125,0 | 53,5 | 34,0 | 90,0  | 20,0 | 89,86  | 47,0 | 6,5 | 18,0 |
| 420-050-130A                | 5,0   | 30             | 157,07            | 150,0 | 56,5 | 38,0 | 110,0 | 20,0 | 102,47 | 50,0 | 6,5 | 18,0 |


| Artikel-Nr.<br>Ketten Fuchs | Modul | Zähne-<br>zahl | Abmessungen in mm |       |      |      |       |      |        |      |      |      |
|-----------------------------|-------|----------------|-------------------|-------|------|------|-------|------|--------|------|------|------|
|                             |       |                | de                | dp    | A    | F    | Dn    | D1   | dm     | L    | S    | Lm   |
| 420-015-216A                | 1,5   | 16             | 26,68             | 24,0  | 19,5 | 8,0  | 21,0  | 10,0 | 35,83  | 18,0 | 1,5  | 11,3 |
| 420-015-232A                | 1,5   | 32             | 49,34             | 48,0  | 20,0 | 8,0  | 32,0  | 12,0 | 27,45  | 17,0 | 3,0  | 10,0 |
| 420-020-216A                | 2,0   | 16             | 35,57             | 32,0  | 23,0 | 10,0 | 26,0  | 10,0 | 45,41  | 21,0 | 2,0  | 11,9 |
| 420-020-232A                | 2,0   | 32             | 65,78             | 64,0  | 25,0 | 10,0 | 40,0  | 12,0 | 35,21  | 21,0 | 4,0  | 10,0 |
| 420-025-216A                | 2,5   | 16             | 44,47             | 40,0  | 27,5 | 12,0 | 34,0  | 12,0 | 55,88  | 25,0 | 2,5  | 14,4 |
| 420-025-232A                | 2,5   | 32             | 82,23             | 80,0  | 25,0 | 12,0 | 50,0  | 15,0 | 37,97  | 20,0 | 5,0  | 10,0 |
| 420-030-216A                | 3,0   | 16             | 53,36             | 48,0  | 28,0 | 15,0 | 40,0  | 15,0 | 61,64  | 25,0 | 3,0  | 11,6 |
| 420-030-232A                | 3,0   | 32             | 98,68             | 96,0  | 30,0 | 15,0 | 60,0  | 15,0 | 45,31  | 24,0 | 6,0  | 10,0 |
| 420-035-216A                | 3,5   | 16             | 62,26             | 56,0  | 33,5 | 18,0 | 48,0  | 15,0 | 72,33  | 30,0 | 3,5  | 14,4 |
| 420-035-232A                | 3,5   | 32             | 115,12            | 112,0 | 31,0 | 18,0 | 70,0  | 20,0 | 48,77  | 24,0 | 7,0  | 10,0 |
| 420-040-216A                | 4,0   | 16             | 71,15             | 64,0  | 36,0 | 20,0 | 50,0  | 15,0 | 80,81  | 32,0 | 4,0  | 13,4 |
| 420-040-232A                | 4,0   | 32             | 131,57            | 128,0 | 32,0 | 20,0 | 80,0  | 20,0 | 52,42  | 24,0 | 8,0  | 10,0 |
| 420-045-216A                | 4,5   | 16             | 80,05             | 72,0  | 39,5 | 22,0 | 60,0  | 20,0 | 90,50  | 35,0 | 4,5  | 15,4 |
| 420-045-232A                | 4,5   | 32             | 148,00            | 144,0 | 36,0 | 22,0 | 90,0  | 20,0 | 59,21  | 27,0 | 9,0  | 10,0 |
| 420-050-216A                | 5,0   | 16             | 88,94             | 80,0  | 50,0 | 25,0 | 60,0  | 20,0 | 106,06 | 45,0 | 5,0  | 21,1 |
| 420-050-232A                | 5,0   | 32             | 164,46            | 160,0 | 38,0 | 25,0 | 100,0 | 20,0 | 63,52  | 28,0 | 10,0 | 10,0 |

## Kegelräder

### Standard-Kegelräder Typ A

gerade verzahnt 90°  
Eingriffswinkel 20°

Übersetzungsverhältnis 1:1

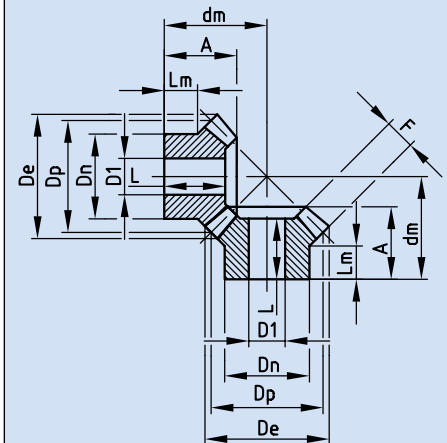


Material: C 43

### Standard-Kegelräder Typ A

gerade verzahnt 90°  
Eingriffswinkel 20°

Übersetzungsverhältnis 1:2

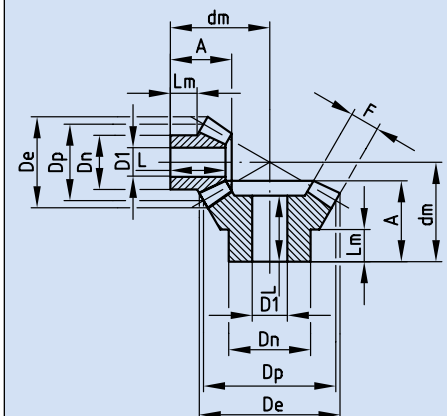

Material: C 43